


# Dry Contact (Direct Control)

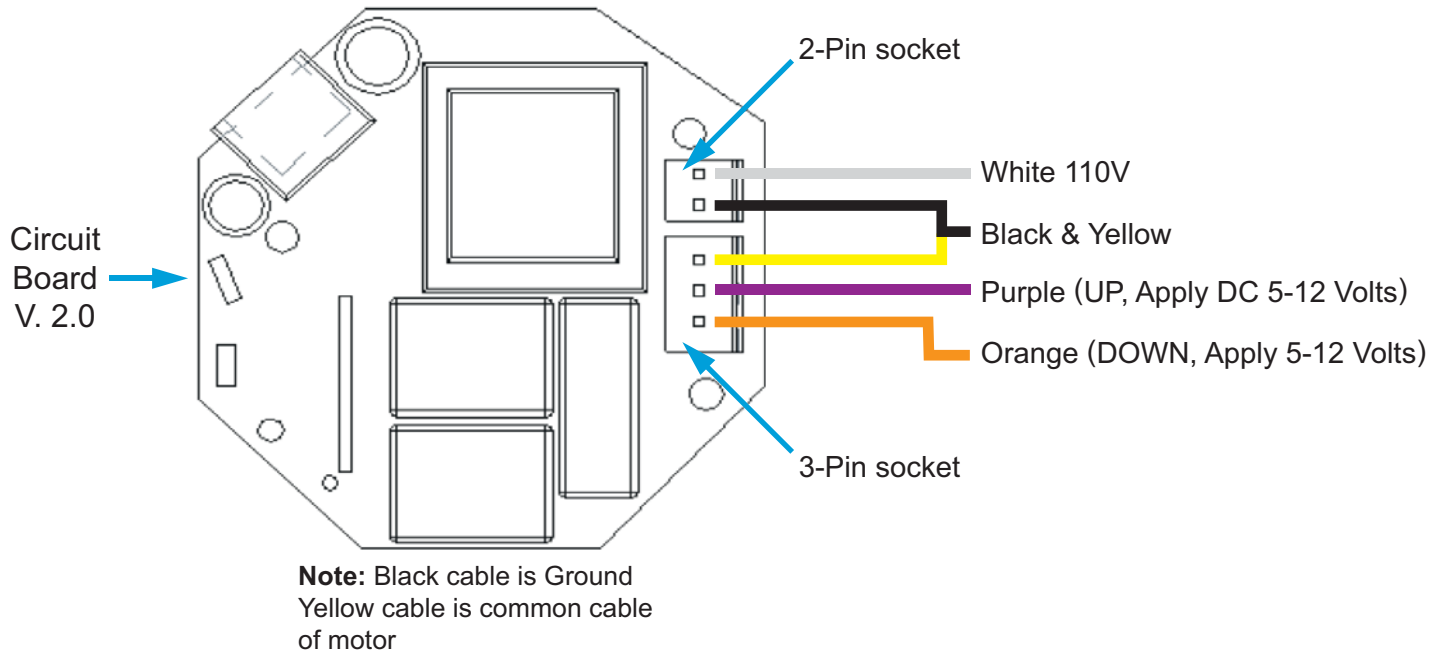

**Follow the steps below to achieve a direct control connection between the projection screen and a direct control device.**

- Step 1: Remove the Left End Cap (as you face the front of the screen)
- Step 2: Wire 3-Pin/Yellow and 2-Pin/Black together
- Step 3: Connect 2-Pin/White to 110V
- Step 4: Connect 3Pin/Orange wire to Up Control
- Step 5: Connect 3Pin/Purple wire to Down Control

Applies to all Series: Spectrum, VMAX 2, Home 2, CineTension 2, VMAX Plus3/4, Evanesce, Evanesce Tension, Kestrel, Kestrel Tension, Raptor, Raptor Tension, Raptor Module, and Raptor Module Tension