

Microsoft

70-489 Exam

Developing Microsoft SharePoint Server 2013 Advanced Solutions



Thank you for Downloading 70-489 exam PDF Demo

You can also Buy our 70-489 Premium Full Version

<https://www.certkillers.net/Exam/70-489>

<https://www.certkillers.net>

Case Study: 1**Trey Research****Background**

You develop an intranet portal for Trey Research. End users of the portal are researchers and office staff.

Business Requirements

All end users must be able to customize their profile with relevant information. Researchers must store research papers, upload supporting documents, and search content.

Storage

The portal must use an existing Microsoft SQL Server database to access and store work profile information and research papers.

Data Access

The portal must use Business Connectivity Services (BCS) to access data from external systems.

Researchers must search content from SharePoint and external systems.

Researchers must manage a research topic and related content as a single entity.


User Profile

Employees must be able to customize their profile.

Administrators must be able to create new profile properties.

Technical Requirements**Data Store**

The data model for the database entities is shown below:

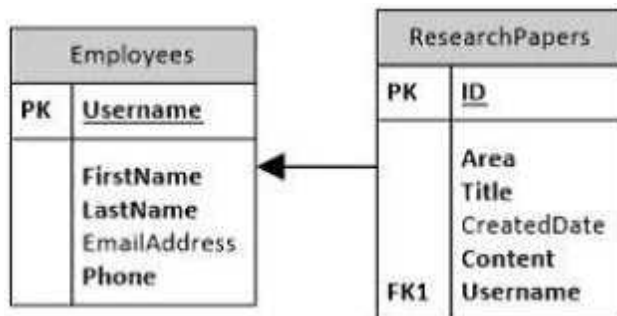

Users must not be allowed to update the Employees.Username and ResearchPapers.ID fields. The fields uniquely distinguish the corresponding entity.

Access External Data

You must create an external content type named TreyResearch to access the SQL data source. During development, the data source will be accessible locally.

You must develop an app to access the fields named Employee Name and Research Paper Title.

Researchers must be able to find all research papers that are written by a particular employee.

A research paper always must be associated with the employee that wrote it.

Document Management

Researchers must be able to upload research papers and relevant supporting materials into a document set named Research Content.

All the document sets must be stored in a list named ResearchPapers.

All documents that are uploaded must contain the prefix DOC in the file name.

Environment

The SQL database will be on a different physical server when the solution is deployed to a production environment. The solution must use the SQL Server user named sqltrey to connect to the database. The BCS service is configured and running in the production environment.

Personalize

You must use custom profile properties to add a new section to the user profile properties page.

The solution must use the client-side object model (CSOM) to upload employee profile pictures.

Employees must be able to change their display name on the site.

Each employee's page must display the value of the DisplayName and Title fields.

Search

The Microsoft Bing API web service must be used to search for research papers.

No code must be written.

The app must use a Content Enrichment web service named AbstractIndexer. The app must use the AbstractIndexer service to index search content.

The solution must store large-sized media files in a dedicated SQL Server database.

The database must use the ResearchPapers.ID field as the foreign key to associate the field with the TreyResearch external content type.

Application Structure

Relevant portions of the solution files are shown below. (Line numbers in the code segments are included for reference only and include a two-character prefix that denotes the specific file to which they belong.)

App.js

```
AJ01 var context;
AJ02 var web;
AJ03 var user;
AJ04
AJ05
AJ06 $.ajax({
AJ07     url: listURL,
AJ08     headers: {
AJ09         "accept": "application/json",
AJ10         "X-RequestDigest": $("#__REQUESTDIGEST").val()
AJ11     },
AJ12     success: this.showItems,
AJ13     error: this.failMethod
AJ14 });
AJ15 }
AJ16
AJ17 this.showItems = function (data) {
AJ18     $("#Container").children().remove();
AJ19     $.each(data.d.results, function (key, val) {
AJ20         var item = $("#EmployeeInfoTemplate").clone()
AJ21         .attr("id", val.BdcIdentity)
AJ22         .fadeIn("slow");
AJ23         -
AJ24         item.appendTo("#Container");
AJ25     });
AJ26 }
AJ27
AJ28 this.failMethod = function (jqXHR, textStatus, errorThrown) {
AJ29     alert('failed: ' + errorThrown);
AJ30 }
AJ31 }
AJ32 ExecuteOrDelayUntilScriptLoaded(getEmployees, "sp.js");
AJ33 });
AJ34
AJ35 function getEmployees() {
AJ36     var grid = new AppLevelECT.Grid
AJ37     ("ColumnContainer", 3, _spPageContextInfo.webServerRelativeUrl);
AJ38     grid.init();
AJ39 }
```

ManageUserProfiles.es

```

MP01 namespace ManageUserProfiles
MP02 {
MP03     class ProfileProperties
MP04     {
MP05         public static void AddProfileProperty(string name, string displayName,
MP06         bool isMultivalued)
MP07         {
MP08             using (SPSite site = new SPSite("http://treyresearch.com/users"))
MP09             {
MP10                 SPServiceContext svcContext = SPServiceContext.GetContext(site);
MP11                 try
MP12                 {
MP13                     ProfilePropertyManager prfPropMgr;
MP14                     ProfileSubtypeManager prfTypeMgr;
MP15                     ProfileSubtypePropertyManager prftypePropMgr;
MP16                     ProfileTypePropertyManager typPropMgr;
MP17                     ProfileSubtypeProperty prfTypeProp;
MP18                     ProfileTypeProperty prfProp;
MP19                     ProfileSubtype prfType;
MP20                     CorePropertyManager corePropMgr;
MP21                     CoreProperty coreProp;
MP22                     prfPropMgr = new UserProfileConfigManager(svcContext)
MP23                     .ProfilePropertyManager;
MP24
MP25                     prfTypeProp = prftypePropMgr.Create(prfProp);
MP26                     prfTypeProp.IsUserEditable = true;
MP27                     prfTypeProp.DefaultPrivacy = Privacy.Public;
MP28                     prfTypeProp.UserOverridePrivacy = true;
MP29                     prftypePropMgr.Add(prfTypeProp);
MP30                 }
MP31                 catch (System.Exception e)
MP32                 {
MP33                     throw new Exception("Error occurred: " + e.ToString());
MP34                 }
MP35             }
MP36         }
MP37     }
MP38 }
MP39
MP40 public void UploadPicture(string account, string picURL)
MP41 {
MP42     try
MP43     {
MP44     }
MP45     catch (Exception e)
MP46     {
MP47         throw new Exception("Error occurred: " + e.ToString());
MP48     }
MP49 }
MP50 }
MP51
MP52 public UserProfileProperties GetUserProfileProperties(string account)
MP53 {
MP54     var userprfProps = new UserProfileProperties();
MP55
MP56     var clientContext = new ClientContext("http://treyresearch.com/users");

```

ContentManagement.es

```

CM01 private void CreateDocumentSets ()
CM02 {
CM03     using (SPSite site = new SPSite("http://treyresearch.com/sites"))
CM04     {
CM05         using (SPWeb web = site.RootWeb)
CM06         {
CM07
CM08         }
CM09     }
CM10 }
    
```

Question: 1

DRAG DROP

You need to add code to line MP22 to create the custom profile property.

How should you complete the relevant code? (To answer, drag the appropriate code segments to the correct locations in the answer area. Each code segment may be used once or not at all. You may need to drag the split bar between panes or scroll to view content.)

Answer:

<div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">Create (coreProp)</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">Create (corePropMgr)</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">Create (true)</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">Create (false)</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">GetProfileSubtypeProperties</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">GetProfileTypeProperties</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">GetCoreProperties</div>	<p>Answer Area</p> <pre> corePropMgr = prfPropMgr.GetCoreProperties(); coreProp = corePropMgr.Create(true); coreProp.Name = name; coreProp.DisplayName = displayName; coreProp.IsMultivalued = isMultivalued; coreProp.Type = PropertyDataType.StringMultiValue; coreProp.Length = 1024; corePropMgr.Add(coreProp); typPropMgr = prfPropMgr .GetProfileTypeProperties (ProfileType.User); prfProp = typPropMgr.Create(coreProp); prfProp.IsVisibleOnViewer = true; typPropMgr.Add(prfProp); ... prfTypePropMgr = prfPropMgr .GetProfileSubtypeProperties (prfType.Name); </pre>
--	---

Question: 2

DRAG DROP

You need to add code to line MP57 to display the required properties for the user profile. How should you complete the relevant code? (To answer, drag the appropriate code segments to the correct locations in the answer area. Each code segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.)

<pre> clientContext.Load(userPrfProps); clientContext.LoadQuery(userPrfProps); .GetUserProfilePropertyFor(userPrfProps); .GetUserProfilePropertiesFor(userPrfProps); string[] prfProps = new string[] { "DisplayName", "Title" }; string[] prfProps = new string[] { "PreferredName", "Title" }; var prfProps = new ArrayList() { "DisplayName", "Title" }; </pre>	<p>Answer Area</p> <pre> var peopleManager = new PeopleManager(clientContext); ... var userPrfProps = new UserProfilePropertiesForUser(clientContext, account, prfProps); var profilePropertyValue = peopleManager. ... clientContext.ExecuteQuery(); </pre>
--	---

Answer:

<div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">clientContext.Load(userPrfProps);</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">clientContext.LoadQuery(userPrfProps);</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">.GetUserProfilePropertyFor(userPrfProps);</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">.GetUserProfilePropertiesFor(userPrfProps);</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">string[] prfProps = new string[] { "DisplayName", "Title" };</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">string[] prfProps = new string[] { "PreferredName", "Title" };</div> <div style="border: 1px solid green; padding: 2px; margin-bottom: 2px;">var prfProps = new ArrayList() { "DisplayName", "Title" };</div>	<p>Answer Area</p> <pre> var peopleManager = new PeopleManager(clientContext); string[] prfProps = new string[] { "DisplayName", "Title" }; var userPrfProps = new UserProfilePropertiesForUser(clientContext, account, prfProps); var profilePropertyValue = peopleManager. .GetUserProfilePropertiesFor(userPrfProps); clientContext.Load(userPrfProps); clientContext.ExecuteQuery(); </pre>
---	--

Question: 3

You need to configure the external content type to search for research papers.

Which indexing connector should you use?

- A. .NET Type Connector
- B. WCF Service Connector
- C. Custom Connector
- D. SQL Server Connector

Answer: B

Question: 4

You need to generate document identifiers for each new document that is uploaded to the site. What should you do?

- A. Create a derived class that inherits from the abstract class named `Microsoft.Office.DocumentManagement.DocumentId` and then override all of the abstract methods.
- B. Create a derived class that inherits from the abstract class named `Microsoft.Office.DocumentManagement.DocumentIdProvider` and then override all of the virtual members.
- C. Create a derived class that inherits from the `Microsoft.Office.DocumentManagement.DocumentIdProvider` abstract class and then implement all abstract members.
- D. Create a class to implement the `Microsoft.Office.DocumentManagement.IDocumentId` interface and then override all of the virtual members.

Answer: B

Question: 5

DRAG DROP

You need to configure authentication for the external content type in the production environment. Which three actions should you perform in sequence? (To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.)

	Answer Area
<p>Add the sqltrey user login to the Secure Store Service.</p>	
<p>Configure permissions to allow the user that is logged in to have access to the Secure Store Service.</p>	
<p>Stop the Business Data Connectivity service.</p>	
<p>Create a Secure Store Service application as a target application.</p>	
<p>Connect to the external data source by using the Impersonated Custom Identity and the target application name.</p>	
<p>Connect to the external data source by using the Impersonated Windows Identity and the target application name.</p>	

Answer:

The screenshot shows a drag-and-drop interface for a SharePoint question. The interface is split into two panes. The left pane contains six code segments with green borders, and the right pane is labeled 'Answer Area' and contains three code segments with red borders.

Left Pane (Green Borders):

- Add the sqltrey user login to the Secure Store Service.
- Configure permissions to allow the user that is logged in to have access to the Secure Store Service.
- Stop the Business Data Connectivity service.
- Create a Secure Store Service application as a target application.
- Connect to the external data source by using the Impersonated Custom Identity and the target application name.
- Connect to the external data source by using the Impersonated Windows Identity and the target application name.

Right Pane (Red Borders):

- Stop the Business Data Connectivity service.
- Add the sqltrey user login to the Secure Store Service.
- Connect to the external data source by using the Impersonated Windows Identity and the target application name.

Question: 6

DRAG DROP

You need to add code at line AJ05 to complete the implementation of the app.

How should you complete the relevant code? (To answer, drag the appropriate code segment to the correct location in the answer area. Each code segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.)

The screenshot shows a drag-and-drop interface for a SharePoint question. The left pane contains six code segments with yellow borders, and the right pane is labeled 'Answer Area' and contains a code editor with a JavaScript function and several empty input fields.

Left Pane (Yellow Borders):

- context.load(user);
- context.init(user);
- Lists/GetByTitle
- Lists/GetByName
- FirstName, LastName, Title
- FirstName, LastName, Phone

Right Pane (Answer Area):

```
function sharePointReady() {
  context = new SP.ClientContext.get_current();
  web = context.get_web();
  user = web.get_currentUser();
  [Empty Input Field]

  context.executeQueryAsync($('#message').text('Hello ' +
    user.get_title()), alert('Failed to get user name.'));
}
$(document).ready(function () {
  window.AppLevelECT = window.AppLevelECT || {};
  AppLevelECT.Grid = function (urlWeb) {
    this.init = function () {
      var listURL = urlWeb +
        "_api/[Empty Input Field]('Employees')/items?" +
        "&select=BdcIdentity,[Empty Input Field]";
    }
  }
}
```

Answer:

The screenshot shows an 'Answer Area' with a list of options on the left and a code snippet on the right. The options are:

- context.load(user):
- context.init(user):
- Lists/GetByTitle
- Lists/GetByName
- FirstName, LastName, Title
- FirstName, LastName, Phone

The code snippet is:

```
function sharePointReady() {
  context = new SP.ClientContext.get_current();
  web = context.get_web();
  user = web.get_currentUser();
  context.load(user);
  context.executeQueryAsync($('#message').text('Hello ' +
    user.get_title()), alert('Failed to get user name.));
}
$(document).ready(function () {
  window.AppLevelECT = window.AppLevelECT || {};
  AppLevelECT.Grid = function (surlWeb) {
    this.init = function () {
      var listURL = surlWeb +
        "_api/Lists/GetByTitle('Employees')/items?" +
        "$select=SdcIdentity,FirstName,LastName,Phone";
    }
  }
}
```

Question: 7

HOTSPOT

You need to create the external content type to support the data model.

In the Return Parameter Configuration dialog box, in the properties section, which options should you select? (To answer, select the appropriate setting or settings in the answer area.)

Properties	
Data Source Element:	Username
.NET Type:	System.String
Map to Identifier:	<input checked="" type="checkbox"/>
Identifier:	<input type="text" value="Username"/>
Field:	<input type="text" value="Username"/>
Display Name:	<input type="text" value="Username"/>
Foreign Identifier:	(Click to Add)
Required:	<input type="checkbox"/>
Read-Only:	<input type="checkbox"/>
Office Property:	<input type="text" value="Unmapped"/>
Show In Picker:	<input type="checkbox"/>
Timestamp Field:	<input type="checkbox"/>

Answer:

Properties	
Data Source Element:	Username
.NET Type:	System.String
Map to Identifier:	<input checked="" type="checkbox"/>
Identifier:	<input type="text" value="Username"/>
Field:	<input type="text" value="Username"/>
Display Name:	<input type="text" value="Username"/>
Foreign Identifier:	(Click to Add)
Required:	<input type="checkbox"/>
Read-Only:	<input type="checkbox"/>
Office Property:	<input type="text" value="Unmapped"/>
Show In Picker:	<input type="checkbox"/>
Timestamp Field:	<input type="checkbox"/>

Question: 8

HOTSPOT

You need to add code to line CM07 to create the Research Content document set.
How should you complete the relevant code? (To answer, select the appropriate option from the dropdown list in the answer area.)

```

SPList lst = web.Lists[""];
SPFolder folder = lst.RootFolder;
SPContentType docsetCT = lst.ContentTypes["Document Set"];

Hashtable properties = new  ();

properties.Add("Name", "Research Name");
properties.Add("Description", "Research Description");
properties.Add("Content1", "Video File Name");
properties.Add("Content2", "Audio File Name");
var docSet = DocumentSet.
;

SPList lst = web.Lists[""];

RootFolder
Document Sets
ResearchPapers
Shared Documents

SPFolder folder = lst.RootFolder;
SPContentType docsetCT = lst.ContentTypes["Document Set"];

Hashtable properties = new  ();


ArrayList
Dictionary
Hashtable

properties.Add("Name", "Research Name");
properties.Add("Description", "Research Description");
properties.Add("Content1", "Video File Name");
properties.Add("Content2", "Audio File Name");
var docSet = DocumentSet.
;
Create(folder, "Research Content", docsetCT.Id, properties);
Create(folder, "Research Content", lst, properties);
Create(folder, "Research Documents", docsetCT.Id, properties, true);


```

Answer:


```

SPList lst = web.Lists[""];

SPFolder folder = lst.RootFolder;
SPContentType docsetCT = lst.ContentTypes["Document Set"];

Hashtable properties = new  ();

properties.Add("Name", "Research Name");
properties.Add("Description", "Research Description");
properties.Add("Content1", "Video File Name");
properties.Add("Content2", "Audio File Name");
var docSet = DocumentSet.


Create(folder, "Research Content", docsetCT.Id, properties);
Create(folder, "Research Content", lst, properties);
Create(folder, "Research Documents", docsetCT.Id, properties, true);

```

Question: 9

You need to configure authentication to access the SQL data source during development. Which authentication mechanism should you use?

- A. Impersonated Windows Identity
- B. Pass Through
- C. Impersonated Custom Identity
- D. Forms Based Authentication

Answer: B

Question: 10

You need to ensure that users can upload pictures. Which code segment should you insert at line MP57?

- A.

```
using (SPSite site = new SPSite("http://treyresearch.com/users"))
{
    var upm = new UserProfileManager(clientContext);
    var up = upm.GetUserProfile(account);
    up["PictureUrl"].Value = picURL;
    up.Commit();
}
```
- B.

```
var peopleManager = new PeopleManager(clientContext);
var personProperties = peopleManager.GetPropertiesFor(account);
...
Stream sr = new System.IO.FileStream(picURL, FileMode.Open);
peopleManager.SetMyProfilePicture(sr);
...
```
- C.

```
using (SPSite site = new SPSite("http://treyresearch.com/users"))
{
    var upm = new UserProfileManager(clientContext);
    var up = upm.GetUserProfile(account);
    Stream sr = new System.IO.FileStream(picURL, FileMode.Open);
    up.PictureUrl.SetMyProfilePicture(sr);
    up.Commit();
}
```
- D.

```
var peopleManager = new PeopleManager(clientContext);
var personProperties = peopleManager.GetPropertiesFor(account);
...
Stream sr = new System.IO.FileStream(picURL, FileMode.Open);
personProperties.PictureUrl = picURL;
...
```

- A. Option A
B. Option B
C. Option C
D. Option D

Answer: B

Thank You for trying 70-489 PDF Demo

To Buy our 70-489 Premium Full Version visit link below

<https://www.certkillers.net/Exam/70-489>

Start Your 70-489 Preparation

“”

Download and Pass Exam 70-489 Easily with CertKillers.net questions.

<https://www.certkillers.net>